


Converter

USB to RS 232 or RS 485 Data Converter



Features

- USB To UART Bridge Controller
- No external power required
- Small and compact unit
- One side USB connector and other side RJ45
- On site selectable RS 232 or RS 485 4 wire using switch.
- Built in auto power ON REST.
- Low voltage detection and rest circuit
- communication led Indication for RX & TX
- Additional lightning protection TVS on all lines
- Add external load termination and biasing resistors for better performance
- Support for Software / DLL for virtual com port.

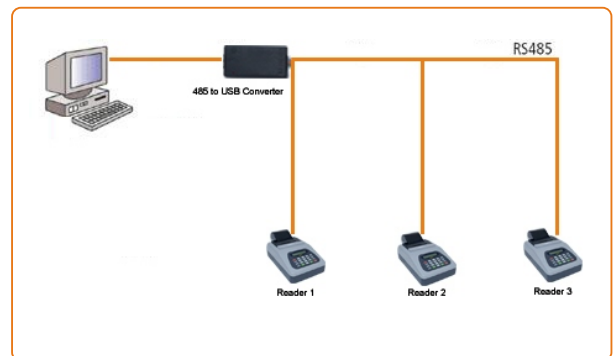

Applications :

- Can be used for Reader interface
- Any RS 232 or RS 485 4 wire interface without hardware flow control

Environment ? Mechanical Features :

Operating temperature 00 to +55°C, Damp heat 400 RH 90% non condensing.

* Specifications subject to change without notice



Spectra Smart Solutions
Private Limited

